



8/16 port PS/2 KVM



Introduction

The KVM MY-8/MY-16 is a PS/2 8/16 port KVM switch which allows user to control multiple computers with one keyboard, monitor and mouse. With the PS/2 8/16 KVM Switch users can use PS/2 cable to control multiple PCs or servers. To make it users friendly, some other features, such as one local console port, Daisy chain capability, On Screen Display (OSD) menu, password security, Searching PC server name, hotkeys control, push buttons and Auto-Scan control, complete keyboard and mouse emulation for simultaneously PC boot-up processes are added to the KVM switch.

Features

- 8/16 - port PS/2 KVM switch
- Supports Windows, DOS, Netware, Unix, Linux
- No Software Required - easy PC selection via On Screen Display (OSD) menu, push buttons, hotkeys
- Provides various hotkey (Scroll-Lock / Cap-Lock / Num-Lock / Alt / Ctrl / Win) for switching PC port and other control functions
- Provides ACL (Access Control List) security function
- Hot Plug - add or remove connected PCs without re-booting KVM switch or PC
- PC/ server name Search function
- High Video Quality
- Supports Daisy Chain function with 8-layer Bus topologies





Specifications

PC Ports

- 8/16 Ports with D-sub 15pin connector

MAX. Distance (KVM Switch to Host)

- 48 feet (15 m)

Video Resolution (Local Console)

- 1920 x 1440

Console Ports

- One (One Local)

Daisy Chain Port

- Supports Daisy Chain function with 8-layer Bus topologies
- Connector with PS/2 Keyboard / Mouse mini Din 15 pin and VGA D-Sub 15 pin

PC Selection

- On Screen Display (OSD) menu, hotkey, push button

PC Port Indicators

- Power (Red) & Operation (Green) for each port

Security

- Provides ACL (Access Control List) security function, store up to 8 independent controllable PC lists
- Supports two layers password

Multilingual OSD (On Screen Display)

- 8 languages (English, France, German, Spanish, Italian, Russian, Japanese, Chinese)

Auto-Scan Intervals

- 5 ~ 99 seconds

Keyboard / Mouse Emulation

- PS/2
- Keyboard/mouse status restored when switching PC

Max. PC Connection

- 120 for MY-8; 128 for MY-16

Power

- DC Power adapter : 12V, 1A

Operation Temperature

- 0 ~ 50 C


Humidity

- 0 ~ 80 %, Non-Condensing

Dimension

- 442 x 140 x 44 mm / 17.4 x 5.5 x 1.7 inches

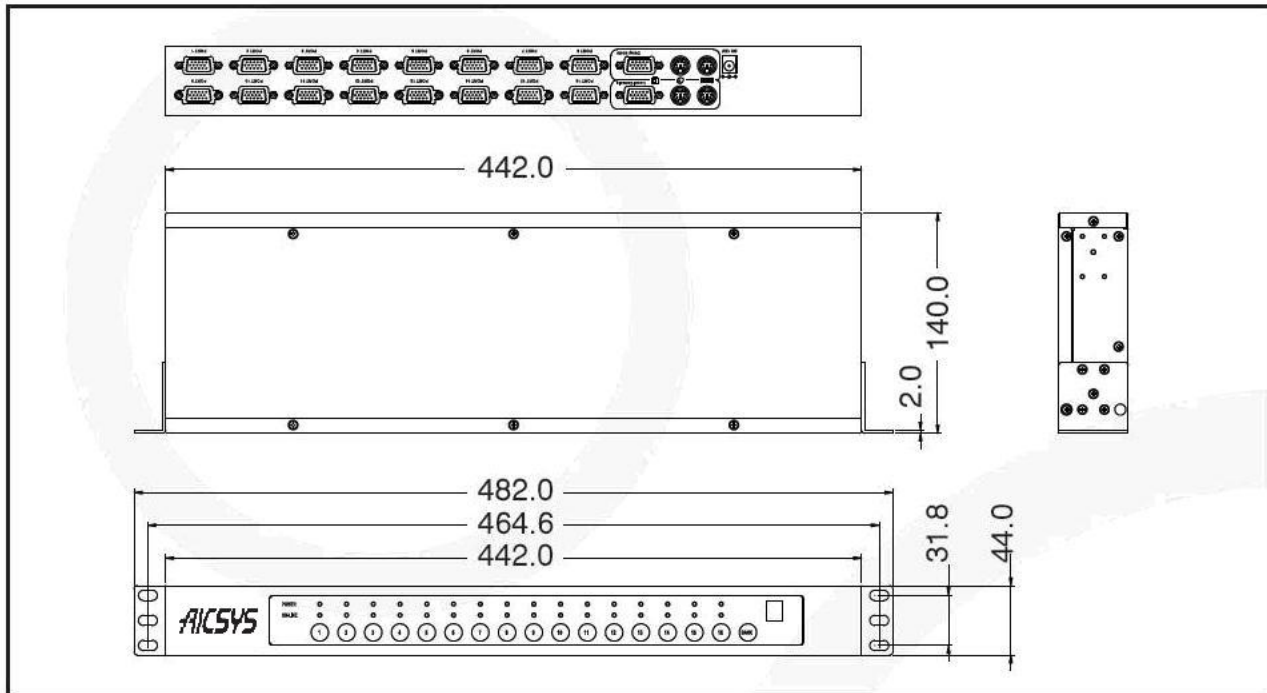


Mechanical Drawing

Ordering Information

KVM MY-8	8 port PS/2 KVM switch
KVM MY-16	16 port PS/2 KVM switch
HDB-1601P	1.8m KVM to PC cable (PS/2)
HDB-1603P	3m KVM to PC cable (PS/2)
HDB-1605P	5m KVM to PC cable (PS/2)
HDB-1610P	10m KVM to PC cable (PS/2)
HDB-1615P	15m KVM to PC cable (PS/2)
HDB-323P	Daisy chain cable