



Compact chassis with 2 drive bays, Low-Noise fan, 2U Redundant 300w Power Supply for micro-ATX motherboard designed for Digital Video recording

2U Redundant 300W Power Supply

Modular bracket for one external

5.25" and one internal 3.5" drive

LED indicators

(2) USB Ports

8cm Low Noise Fan

Lockable front door for maximum access security



Introduction

WMC-402MR "Hawkeye" is the wall mount /desktop industrial grade chassis specifically designed for PC based Digital Video Recording system for security, monitoring, transaction, access control and other safety applications. Within its heavy-duty steel construction it supports standard micro-ATX size, one external 5.25" drive bay for CD-ROM/DVD-ROM and one internal 3.5" drive bay for HDD, sufficient for small video system management. One super Low-Noise 8 cm fan ensures excellent airflow for superior system cooling while maintaining the silence and tranquility of the room. The chassis is now powered by **2U Redundant 300w Power Supply** for a critical operating system where the power can never fail for 24 hours, 7 days a week operation.


Features

- Heavy duty steel construction shoebox industrial chassis can be mounted vertically or horizontally
- Perfect replacement for VCR time-lapse CCTV systems, it is an affordable Digital Video Management System for small businesses and homes, for Digital Signage, Video Wall or Data Wall
- One 5.25" CD-ROM drive-bay and one 3.5" drive bay for HDD
- 8cm low-noise ball bearing fan with air ventilation for excellent airflow
- **2U Redundant 300w Power Supply**
- Modular design for easy installation and maintenance





Mechanical Drawing

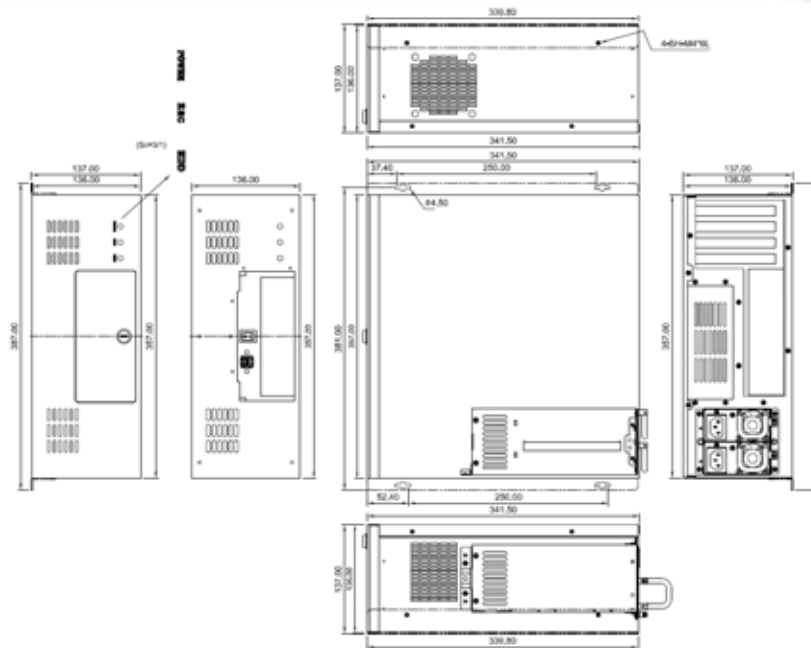

Construction

- Heavy Duty Steel

Color

- Black

Board Support

- Micro ATX motherboard

Drive Bays

- (1) 5.25" CD-ROM & (1) 3.5" internal drive for HDD

Expansion

- Supports up to 4-slots

Power Supply

- 2U Redundant 300w power supply

Cooling System

- One 8cm low-noise ball bearing fan

Ports

- 2 USB Ports on Front Panel

Switches

- Power On/Off switch

Indicators

- On/off LED, HDD LED and one recording in progress LED Defined LED

Dimensions

- 337 (W) x 339.8 (D) x 136 (H) mm
- 13.3 (W) x 13.4 (D) x 5.4 (H) inches

Operating Temperature

- 0~55 °C

Net/Gross Weight

- 5.1Kgs/8Kgs

Ordering Information

- WMC-402MR-300W** Compact chassis with (2) drive bays, 2U Redundant 300w Power Supply for micro-ATX motherboard
- WMC-402MR** Compact chassis with (2) drive bays