# RCK-104BA



1U rackmount chassis for Single Board Computer with 4 drive bays, PICMG backplane and optional 250W/300W ATX power supply

250/300W ATX Power Supply Optional 2 PCI Slot Backplane —

**System Buzzer** 

Brackets for one slim CD-ROM, one slim FDD and two 3.5" Drives

Front Door Latch -

4cm Fans



#### Introduction

The **RCK-104BA** boasts a depth of only 450mm (17.7"), and is one of the shortest 1U chassis providing an ideal solution for those applications where depth can make or break a project. Designed to support a PICMG Backplane and Full or Half-Size SBC, the RCK-104BA proves to be a perfect choice for any ISP or Telecom application. The RCK-104BA can support up to four drive bays, (1) slim CD-ROM/DVD-ROM, (1) slim FDD, and (2) "hidden" internal 3.5" bays. Additional I/O expansion can be easily configured through the 2 PCI slots found on the optional PICMG backplane. Total of three 4cm ball bearing fans ensure excellent airflow when faced with a heat sensitive application. The RCK-104BA provides a robust solution to Firewall Server, Proxy Server, VPN Gateway while still remaining compact.

#### **Features**


- Heavy duty steel construction with only 450mm in depth
- Supports Full Size SBC through PICMG butterfly backplane
- Supports Full Length PCI Expansion
- Drive Bays: (1) Slim CD-ROM, (1) Slim FDD, (2) 3.5"HDD (Hidden)
- ■USB and PS/2 ports on the front panel
- Three 4cm ball bearing fans to ensure excellent heat dissipation
- Optional 250/300W ATX power supply included



# RCK-104BA

# **Mechanical Drawing**



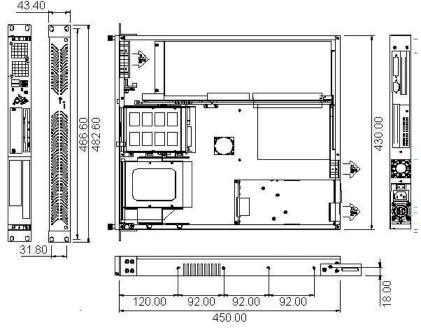

# Construction

• Heavy duty steel

#### Color

Black

### **Board Support**

Single Board Computer

#### **Drive Bays**

• (1) Slim CD-ROM, (1) Slim FDD, (2) 3.5"HDD (Hidden)

# **Expansion**

• PICMG backplane with 2 PCI slot

## **Power Supply**

• 250/300W ATX power supply

## **Cooling System**

• Three 4cm ball bearing fans

#### Audio

One 8Ω system buzzer

#### **Switches**

• On/Off Switch and Reset Switch

#### **Indicators**

• Power On/Off LED and HDD LED

#### **Dimensions**

- 430(W) x 450(D) x 43.4(H) mm
- 16.9 (W) x 17.7 (D) x 1.7 (H) inches

## **Operating Temperature**

● 0~45 °C

### **Gross Weight**

• 10.8kg

# **Ordering Information**

**RCK-104BA** 1U chassis RCK-104BA with 1 -403P-250W PICMG,2 PCI backplane and 1U

250W ATX power supply

**RCK-104BA** 1U chassis RCK-104BA with 1 -403P-300W PICMG,2 PCI backplane and 1U

300W ATX power supply



12F-3 No.77, Sec. 1,Shin Tai Wu Rd, 221 Hsi Chi, Taipei Hsien, Taiwan T +886-2-2698-3391 F +886-2-2698-3291

Sales: <u>sales @aicsys.com</u>

Technical support: support@aicsys.com