




2U Rackmount Chassis with (1) 5.25" and (2) 3.5" Drive Bays, with 4 PCI slots PICMG Butterfly Backplane, supports Full/Half Size SBC, with Environmental Monitor Board

4-Slot PCI PICMG Backplane
Supports PS/2 Size Power Supply
Brackets for (1) 5.25", (1) 3.5" drive and (2) internal 3.5" drives
(2) 6cm Ball Bearing Fans and extra space for additional fans

Latched Front Doors and Replaceable Air Filter
Two alternative positions for (2) 2.0 USB ports

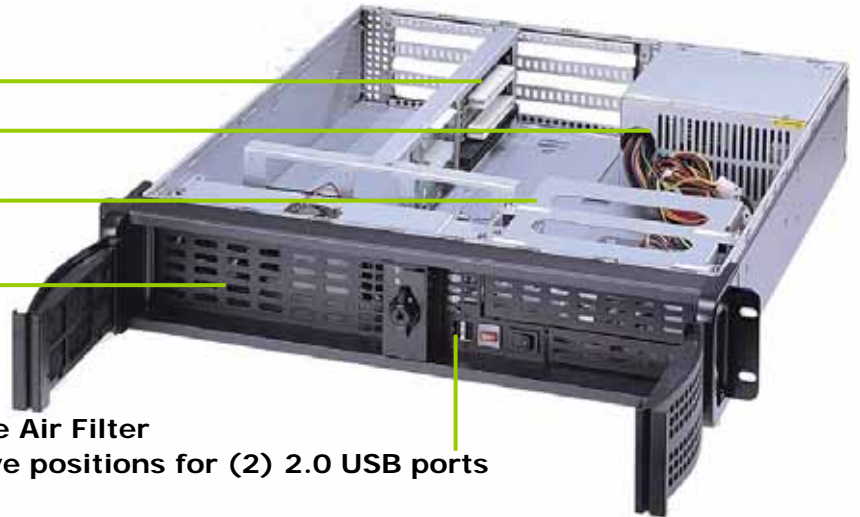


Introduction

The **RCK-203BA** 2U Rack mount Chassis provides a classy and resourceful solution for a variety of Industrial applications using Full/Half Size SBC through a (4) PCI slot PICMG butterfly backplane. **RCK-203BA** offers one 5.25" and two 3.5" shock resistive drive bays. Two levels temperature management relies on two ball bearing 6cm fan that provide excellent cooling and System Environmental Monitor that warns users when the system temperature is above normal. One extra space for optional additional fan is provided for more heat sensitive application. **RCK-203BA** offers two alternative positions for two 2.0 USB ports. **RCK-203BA** supports standard PS/2 ATX Power Supplies

Features

- Standard 2U 19" Rackmount Chassis
- Heavy Duty Steel with Ni plating RoHS compliant
- Front Panel with Lockable Doors to Protect Drives
- 5.25", (1) 3.5" FDD, (1) 3.5" internal HDD drive bays with shock-resistant drive brackets
- 2.0 USB ports with two alternative positions to choose
- PCI slot PICMGA backplane supports Full/Half Size SBC
- System Environmental Monitor
- Extra space for one additional 6cm fan

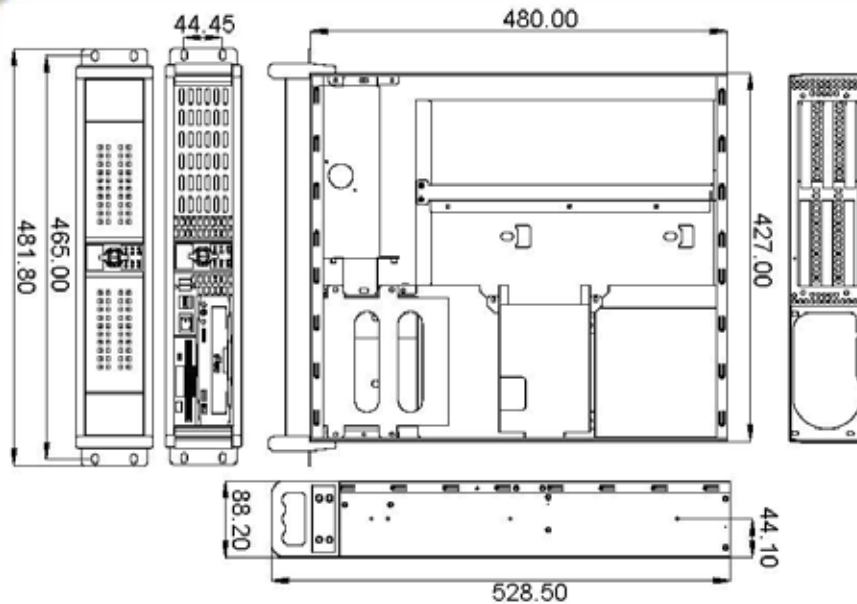
Mechanical Drawing

Construction

- Zinc-Coated Steel with Aluminum Alloy front bezel

Color

- Black

Board Support

- Full/Half Size SBC

Drive Bays

- 5.25" and (1) 3.5" external drives and (1) 3.5" internal drives

Expansion

- 4 PCI slot PICMG butterfly backplane

Power Supply

- Supports PS/2 size power supply

Cooling System

- (2) 6 cm and environmental monitoring board. One extra space for additional 6cm fan

Ports

- (2) USB ports on front panel

Switches

- On/Off Switch and Reset Switch

Indicators

- LED for Power ON/OFF, HDD, Fan & Alarm

Dimensions

- 481.8(W) x 528.5(D) x 88.2(H)mm

Operating Temperature

- 0~55 °C

Gross Weight

- 12kg

Ordering Information

RCK-203BA	2U chassis for ATX motherboard
-0604PA	with (1) 5.25", (1) 3.5" FDD, (1) 3.5" Internal drive bays and 4 PCI slot PICMG backplane
RCK-203BA	RCK-203BA with 400W PS/2
-0604PA-400W	